



System TWIN-GAS

DESCRIPTION

Concentric stainless steel flue pipe for room-air independent heating appliances

MATERIAL

Inside: 1.4404 (316L)

Outside: 1.4301 (304)

FINISHING

Highly polished

WALL THICKNESS

Inside: 0.5 mm

Outside: 0.5 mm

DIAMETER

100/50 mm and 130/200 mm

CONNECTION

Socket / bead with special internal, glued-in gasket in the outer tube

LOCKING BAND/GASKET

Included in the standard scope of delivery of every straight pipe element

SYSTEM CERTIFICATION

The Jeremias exhaust system TWIN-GAS is already available from many manufacturers of decorative gas fireplaces and gas stoves with their devices system certified and only approved in this combination.


System certifications currently exist with: Glen Dimplex (Faber Chimneys), Bellfires (formerly Interfocus), Element4, Ortal, STUV, Attika, Rais, Camina Schmid, Max Blank, Hoxter, Metalfire

ORDER CODE

The article code for your order results from:

Article code + Ø (Ex: TWG14100/150).

Please refer to the respective code for deviations.

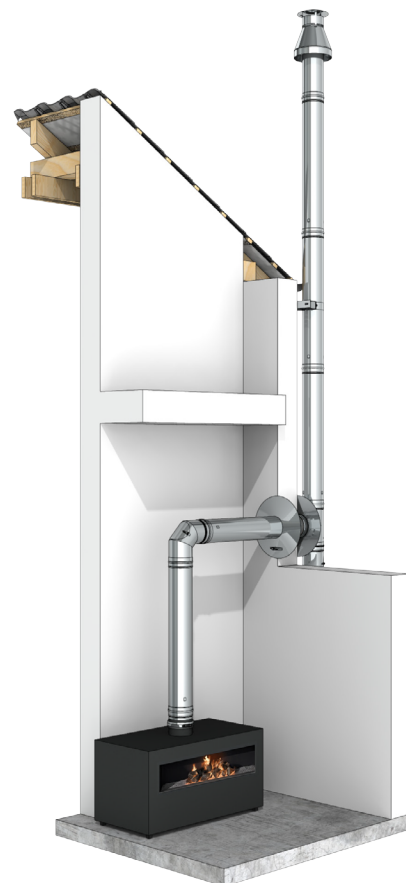

CHARACTERISTICS

- Moisture resistant
- Pressure-tight outer tube through glued silicon gasket
- This prevents exchange with room air in the installation room

APPLICATION AREAS

- Decorative gas fireplaces

CE MARK NUMBER

0036 CPR 9174 078

CE CLASSIFICATIONS - DIN EN 1856-1

T250 - N1 - W - V2 - L50040 - O00

T400 - N1 - W - V2 - L50040 - O50

T600 - N1 - W - V2 - L50040 - O50

CONNECTING PIPE

CE MARK NUMBER

0036 CPR 9174 090

CE CLASSIFICATIONS - DIN EN 1856-2

T400 - N1 - W - V2 - L50040 - O100M

T600 - N1 - W - V2 - L50040 - O100M

Further classifications for special installation variants can be found in our current TWIN-GAS brochure

Cantilevers type I
350mm

Cantilevers type II
500mm

Cantilevers Type III
750mm

Cantilevers type IV
1030mm

Base plate with
2x1/2 " exterior
nipple closing cap
and condensate
drain at the bottom

Base plate for inter-
mediate support

Condensate collec-
tor with bottom
drain 1/2" female
socket and plug
screw M10



Rgr.
DW





Rgr.
DW



Rgr.
DW



Rgr.
DW



DW391	DW392	DW393	DW407	TWG05Ø	TWG07Ø	TWG2024Ø
122,00 €	137,00 €	167,00 €	274,00 €	100/150 116,00 € 130/200 154,00 €	100/150 162,00 € 130/200 254,00 €	100/150 181,00 € 130/200 202,00 €

Condensate collec-
tor without drain

Length 1000mm


Length 500mm

Length 250mm

Length 1000mm
with reinforcement
& 4 lugs

Inspection length
(up to 600°C/N1)

Wall bracket 50mm



Rgr.
DW

TWG43Ø	TWG13Ø	TWG14Ø	TWG15Ø	TWG1801Ø	TWG10Ø	ZUWA704Ø
100/150 93,00 € 130/200 111,00 €	100/150 138,00 € 130/200 180,00 €	100/150 99,00 € 130/200 157,00 €	100/150 67,00 € 130/200 122,00 €	100/150 155,00 € 130/200 200,00 €	100/150 138,00 € 130/200 222,00 €	150 46,00 € 200 54,00 €

Wall bracket exten-
sion l=130mm

Wall bracket exten-
sion l=200mm


Wall bracket exten-
sion l=250mm

Wall bracket exten-
sion l=400mm

Wall bracket 50mm

Adjustable wall
bracket 50-150mm,
single-braced


Adjustable wall bra-
cket 150-250mm,
single-braced




Rgr.
DW




Rgr.
DW



Rgr.
DW



Rgr.
DW



ZUWA891-130	ZUWA891-200	ZUWA891-250	ZUWA706	TW21Ø	TW22Ø	TW23Ø
39,00 €	46,00 €	57,00 €	99,00 €	150 63,00 € 200 69,00 €	150 106,00 € 200 110,00 €	150 122,00 € 200 126,00 €

Adjustable wall bracket 250-360mm, single-braced

Adjustable wall bracket (head/wall part), wall distance from 250mm, single-braced



Extension 30x30mm for TW20 l=1000mm

Extension 30x30mm for TW20 l=500mm

Concentric reducer

End cap with Adaptor FLEX/TWIN-GAS

End cap with Adaptor EW-FU/TWIN-GAS

						
TW24Ø	TW20Ø	DW86	DW85	TWGRØ-Ø	TWG1276DØ	TWG1732Ø
150 165,00 € 200 171,00 €	150 115,00 € 200 125,00 €	81,00 €	59,00 €	A 130/200 116,00 € B 100/150	100/150 298,00 € 130/200 393,00 €	100/150 332,00 € 130/200 431,00 €

Adaptor screwable EW-FU/EW-FLEX

Adaptor TWIN GAS/shaft



Elbow 15°

Elbow 30°

Elbow 45°

Elbow 90°

Elbow 90°C with support

						
FD08Ø	ZUWA1618Ø	TWG16Ø	TWG17Ø	TWG18Ø	TWG60Ø	TWG1786Ø
100 59,00 € 130 66,00 €	150 42,00 € 200 59,00 €	100/150 116,00 € 130/200 185,00 €	100/150 116,00 € 130/200 185,00 €	100/150 116,00 € 130/200 185,00 €	100/150 169,00 € 130/200 213,00 €	100/150 218,00 € 130/200 269,00 €

Elbow 90°C with support

Support rail l=350mm



Support rail l=500mm

Support rail l=700mm

Elbow 90° with inspection door (up to 600°C/N1)

Elbow 90° with inspection door and test point (up to 600°C /N1)

Elbow 90° with inspection door and 2 test points

						
FU061785Ø	FU422	FU422B	FU422C	TWG19Ø	TWG1677Ø	TWG19-2Ø
100 130,00 € 130 138,00 €	116,00 €	131,00 €	158,00 €	100/150 222,00 € 130/200 265,00 €	100/150 256,00 € 130/200 301,00 €	100/150 316,00 € 130/200 348,00 €

- ^{*1} Please specify the type of decorative gas fireplace to choose the right connection
- ^{*2} Use in coordination with the authorized district chimney sweep.


Elbow 90° eccentric (connection with TWG1619)

T-90°


Terminal horizontal (inner tube eccentric)

Terminal vertical

Flat flashing conical with storm collar



^{*2}



TWG1676Ø	TWG317Ø	TWG1619Ø		TWG272Ø	TW52Ø
100/150 130,00 € 130/200 194,00 €	100/150 173,00 € 130/200 222,00 €	100/150 130/200	159,00 € 219,00 €	100/150 245,00 € 130/200 301,00 €	150 142,00 € 200 154,00 €

Flashing kit 5-15° lead base with storm collar

Flashing kit 16-25° lead base with storm collar





Flashing kit 26-35° lead base with storm collar, cone 150mm

Flashing kit 36-45° lead base with storm collar

Ceiling plate 0°, two-piece

Ceiling plate 0-30°, two-piece

Ceiling plate 31-45°, two-piece



TW53Ø	TW59Ø	TW38Ø	TW54Ø	ZUDA074Ø	ZUDA99VØ	ZUDA98VØ
150 262,00 € 200 276,00 €	150 262,00 € 200 276,00 €	150 262,00 € 200 276,00 €	150 262,00 € 200 302,00 €	150 77,00 € 200 99,00 €	150 64,00 € 200 72,00 €	150 76,00 € 200 85,00 €

Ventilated split ceiling plate 0-30°, two-piece

Ventilated split ceiling plate 31-45°, two-piece


Adjustable length for connection line 330-420mm

Length with test point (up to 600°C/N1)

Adaptor for Faber, Bellfires and Metalfire

Adaptor for Attika und Element4

Adaptor for Kalfire




^{*1}



ZUDA99VHLØ	ZUDA98VHLØ	TWG50Ø	TWG51Ø	TWG1634Ø	TWG2003Ø	TWG2027Ø
150 105,00 € 200 110,00 €	150 116,00 € 200 124,00 €	100/150 189,00 € 130/200 191,00 €	100/150 102,00 € 130/200 159,00 €	100/150 79,00 € 130/200 127,00 €	100/150 79,00 € 130/200 127,00 €	130/200 125,00 €

Light rafter bracket Storm collar Locking band (spare part) Gasket silicone up to 200°C



Rgr.
EW



Rgr.
EW

TW55LØ		KL72Ø		TW45Ø		ALBI26Ø	
150	106,00 €	150	46,00 €	150	20,00 €	150	26,00 €
200	109,00 €	200	54,00 €	200	26,00 €	200	31,00 €

Basic Set TWIN-GAS wall-, ceiling-, roof duct sleeve 1000mm

1x wall, ceiling and roof duct, 1x fire protection panels, 1x fire protection adhesive 1 kg, 1x insulation with a thickness of 37mm and l = 500mm, 1x mineral wool, content 300g



*1

Basic Set TWIN-GAS wall-, ceiling-, roof duct sleeve 500mm

1x wall, ceiling and roof duct, 1x fire protection panels, 1x fire protection adhesive 1 kg, 1x insulation with a thickness of 37mm and l = 500mm, 1x mineral wool, content 300g



*1

TWG-WDF-SET1-Ø		TWG-WDF-SET2-Ø	
150	1.924,00 €	150	1.021,00 €
200	2.335,00 €	200	1.252,00 €

*1 According to approval number Z-7.4-3527