



System DW-SILVER

DESCRIPTION

DW-SILVER is suitable for connecting fireplaces for gas, EL heating oil, wood pellets, wood chips and logs for both dry and wet operation

MATERIAL

Inside: 1.4539 (904L) only for components in contact with flue gas

Outside: 1.4301 (304)

Others on request

Also available as DW-KL-SILVER on request

FINISHING

Highly polished

WALL THICKNESS

Inside / Outside each 0.6 mm

Others on request

INSIDE DIAMETER

80 - 300 mm

Others on request up to 1200 mm

INSULATION

Mineral insulation 32.5 mm thick, 50 mm insulation available subject to a surcharge (+ 25%)

CONNECTION

Socket / bead with locking band

LOCKING BAND



Included. For a setup without a T-connection, an extra locking band must be ordered for the chimney top.

ORDER CODE

The article code for your order results from:

Article code + Ø (Example: 301-DW03080).

Please refer to the respective code for deviations.

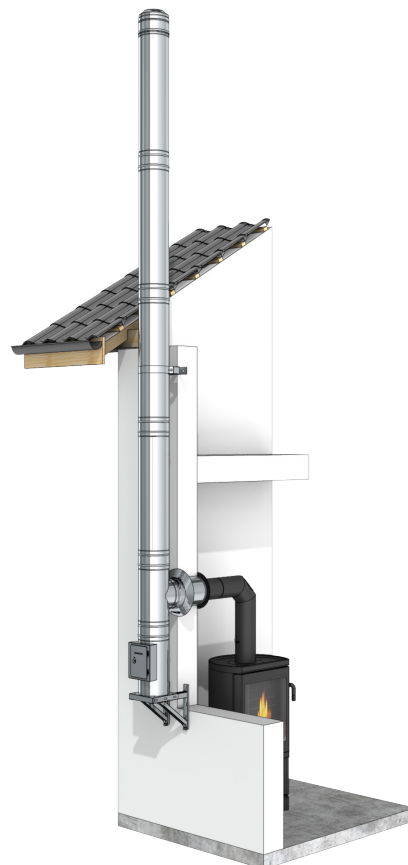

CHARACTERISTICS

- Resistant to soot fire or moisture
- Particularly suitable for discharging flue gases from the combustion of pellets or wood chips in condensing operation
- Versatile exhaust system
- High flexibility, perfect also for difficult installation situations

APPLICATION AREAS

- Standard heating applications for oil and gas
- Natural wood pellets, chips and logs made from natural wood

CERTIFICATE NUMBER

Z - 7.1 - 3375

CE-CLASSIFICATION ACC. TO DIN 18160-1

T600 - N1 - W2¹⁾ - G50 - L00

¹⁾ for wood pellets made from natural wood
for wood chips made from natural wood
for natural firewood
for gas and fuel oil EL

CONNECTING PIPE

CERTIFICATE NUMBER

Z - 7.1 - 3375

T600 - N1 - W2 - G100M