

DESCRIPTION

Single wall, pressure-tight flue system made of plastic

MATERIAL

PP = Polypropylene

WALL THICKNESS

2.0 mm

INSIDE DIAMETER

60 - 250 mm

Others on request

CONNECTION

Socket / bead with internal EPDM gasket

GASKET



Included in the scope of delivery

ORDER CODE

The article code for your order results from:

Article code + Ø (Ex: PP125080).

Please refer to the respective code for deviations.

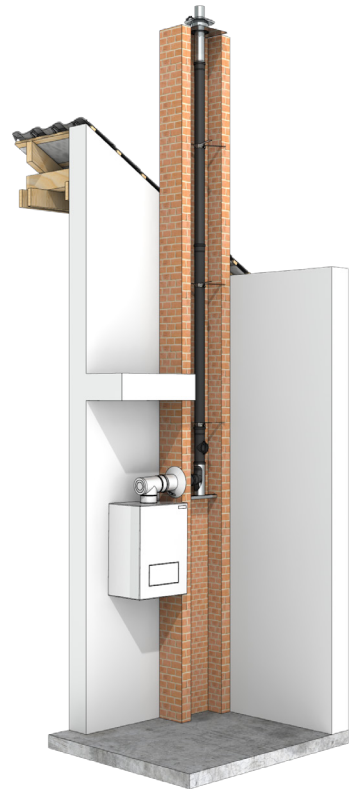

CHARACTERISTICS

- Adapted boiler connections enable connection to all common boiler types
- Annular gap between inner liner and shaft can be used for air supply
- Moisture resistant
- Suitable for use up to 5000 Pa (up to Ø <200 mm)

APPLICATION AREAS

- Condensing boilers
- CHP (up to 100 °C)
- Gas-operated heat pumps

CE MARK NUMBER

0036 CPR 9174 043

CE CLASSIFICATIONS ACC. TO DIN EN 14471

EW-PPS < DN200

T120 - H1 - W2 - O20 - LI - E - U

EW-PPS ≥ DN200

T120 - P1 - W2 - O20 - LI - E - U